AIR ELECTROSTATIC HAND GUN

# B SERIES

HB-X3 • HB5000 • HB6000








HB5000S



Small design (Solvent)

HB-X3S



Our low-voltage, high-efficiency technology has reduced splashes of paint mist.







Transfer efficiency Film coating quality


Safety

Comfortable operation

Furthermore, **HB** series were improved!

Model	HB-X3S/M	HB5000S/M/W	HB6000
Charging system	Low-voltage, high efficiency direct charging earth ring system	Direct charging system	Indirect charging system
Applied voltage	Max DC-30kV	Max DC-60kV	Max DC-30kV
Overall length (includes nozzle and air cap)	180mm	212mm	200mm
Weight (includes nozzle and air cap)	560g	540g	520g
Associated air cap	HN400 (Small pattern) HN600 (Medium pattern) HN800 (Large pattern)		
Paint nozzle diameter	φ 1.1mm		
Associated controller	BPS130 : single gun controller BSP1600 : multi gun controller up to 5-20 guns		
Adaptation paint	Solvent (Solid metallic) water-borne (Solid metallic)		


\*Water-borne paint can be used in HB500W by isolating a paint supply system.

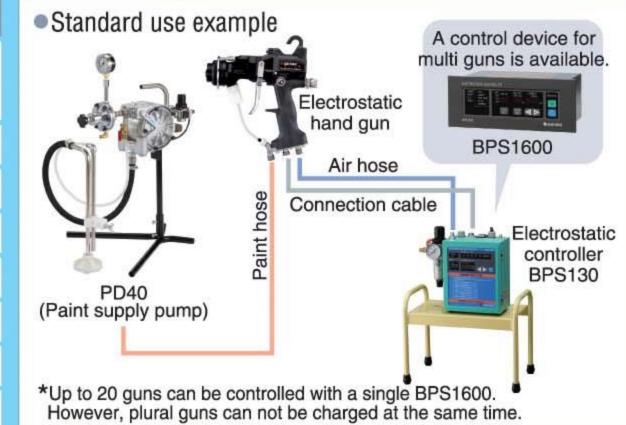




# —There are many reasons so that the HB series is used for painting by users all over the world.—

# High transfer coating, high quality achieved!

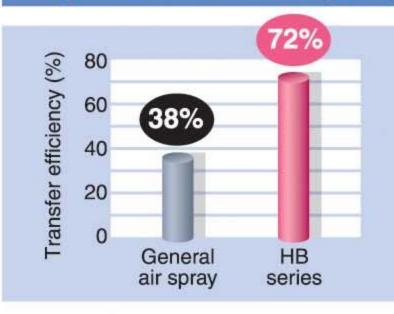


# Reduction for paint consumption

It is approximately 40% of paint consumption by a comparison with general air spray gun, also approximately 20% of paint consumption reduction is possible by a comparison with our conventional equipment. \*It depends on a paint condition.

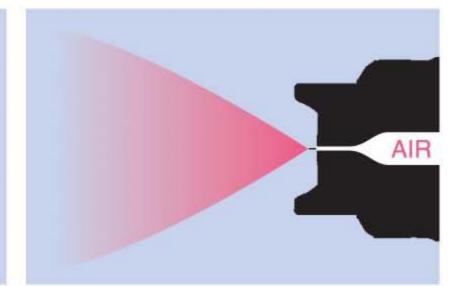

# High atomization performance

The pressure loss inside of gun can be decreased by enlarging an air path as much as possible, and even low-pressure air can facilitate the high atomization painting.

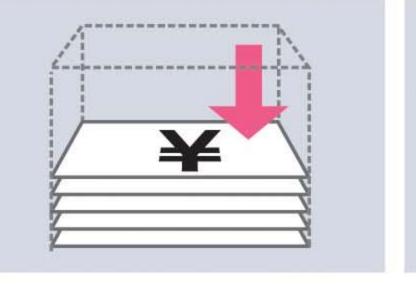

Contributing to cost reduction!


### Cost reduction

sumption and reduction of waste such as cial plastic. the sludge.




### Defective reduction

By high transfer efficiency and excellent It contributes to reduction of the poor paint throwing power for superior penetration, it which cause dirt to gun and air cap and imcontributes to reduction of the paint con- proving first run rate by adoption of the spe-

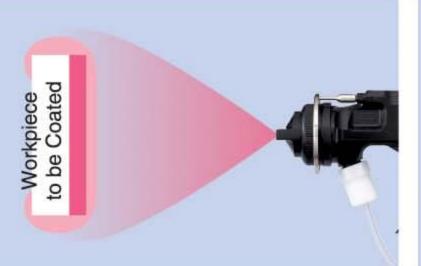


# High-grade film coating quality

By the combination of newly developed air cap and nozzle, high-grade film coating quality is provided. It is steady and superior in atomization.

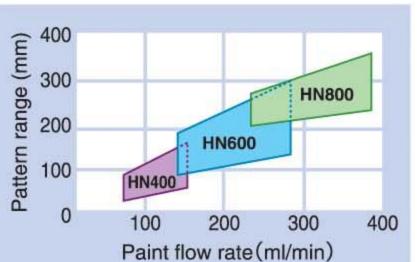

# Three types of air caps

Conforming with a shape of workpiece to be coated or demanding for film coating quality, we prepared three size pattern of air caps such as large, medium, small.

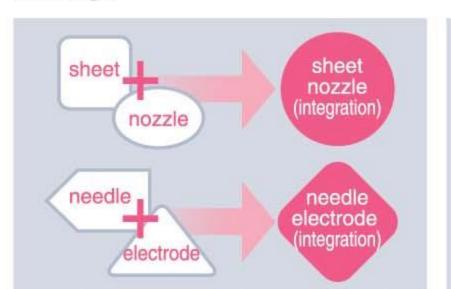

# Runing cost reduction

We reviewed function parts from the begin- Customers who already use our electrostatning and gathered them. The durability of consumption parts largely improved in com- chase of the connection cable separately. parison with a conventional equal parts.



## Initial cost reduction

ic controller (BPS115), can use it by the pur-

# Superior body design!



# Light weight

HB5000S achieved a lighter weight by care-



# Compact design

The HB-X3 is smaller than previous models fully optimizing each part for minimal weight. due to the combined benefits of the earth ring method and a thoroughly compact design.



Pursuit of the comfortable function!

# Improved safety

Even during paint working, it is easily to con- Time for prepared color change can be firm electrostatic applied voltage condition by having HV indicator built-in inside of a easy to put on and take off from a gun. gun body.




# Easy color change

shorten by adoption of tinning nut which it is




# Superior weight balance

It provides superior to characteristics bal- By a grip and a trigger-shape based on ergun grip, and ensured the long-time work holding and comfortable work. tirelessly.

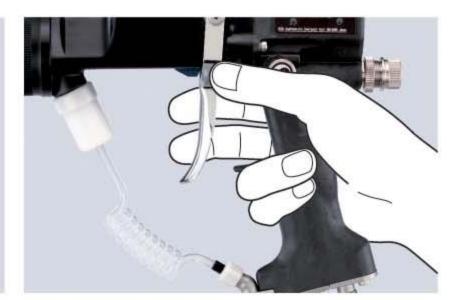

# Functional grip shape

ance by having set a center of gravity on a gonomics, they ensured characteristics for

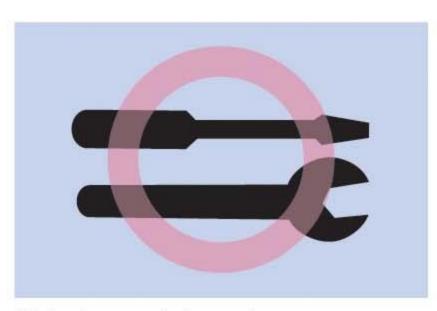

# High characteristics maintenance

By assembling of the main parts, it is available to gather parts for products and also parts are changed easily by general tools.



To be confirmed with a purpose and paint to use, we prepared for 3 types and 6 variations to be able to perform the most suitable painting.

\*Appearances and specifications of the equipment shown on this booklet are subject to be changed for the purpose of its improvement, without pre-announcement.



ISO9001 JQA-2095



ISO14001 JQA-EM2121

# **ASAHI SUNAC CORPORATION**

**Head Office & Factory** 5050 Asahimae-cho Owariasahi, Aichi Pref., 488-8688 Japan

Tel: +81-561-52-0717 Fax: +81-561-54-8847 http://www.sunac.co.jp E-mail: ctrd01@sunac.co.jp